

UNIQ

UC-1830-12B/UC-1830CL-12B

Color Digital CCD Camera

Key Features

- 2/3" Exview HAD* CCD Imager (R, G, B primary color filters)
- 1024 x 1024 active pixels
- 30 Hz frame rate
- 12-bit RS-644 (LVDS) or Camera Link output
- Full frame shutter
- <64 dB
- Asynchronous reset
- 45 MHz data clock
- RS-232C interface Control
- C-mount lens



Description

The UC-1830-12B/UC-1830CL-12B is a high resolution, 12-bit color digital CCD camera using progressive scanning interline-transfer technology with R, G, B primary color mosaic filters (Bayer arrangement). A frame grabber collects digital data and displays color images by software conversion. This color camera is useful for applications where color and high resolution are required. With the asynchronous capture control, high speed moving objects can always be captured. The square pixels are especially suitable for processing, measuring, and analyzing tasks. This compact and lightweight camera offers excellent signal to noise performance. It's compatible with most popular frame grabbers in the market. The "user-friendly" RS-232C interface control allows users to control all camera functions without physically touching the camera.

Applications


UC-1830-12B/UC-1830CL-12B applications include machine vision, automated inspection, motion capture and analysis, high-resolution graphics capture, medical imaging, biomedical imaging, non-contact measurement, microscopy, and other scientific applications where color image is needed.

Specifications:

Model	UC-1830-12B	UC-1830CL-12B
CCD Sensor	2/3" Exview HAD progressive scan interline-transfer CCD (R, G, B primary color mosaic filters)	
Chip Size	8.30 mm x 8.30 mm	
Effective Pixels (H x V)	1024 x 1024	
Unit Cell Size (H x V)	6.45 μm x 6.45 μm	
Pixel Clock	45 MHz (90 MHz for master clock)	
Frame Rate	30 fps	
Sync.	HD: 31.408 KHz; VD: 29.998 Hz	
Digital Video Output	12-bit RS-644/LVDS	Camera Link format
Analog Video Output	1 V p-p, 75ohm (BNC or 12 pin Hirose)	
S/N Ratio	<64 dB	
Min. Illumination	0.04 lux	
Gain	MGC	
Gamma	1.0	
Electronic Shutter	1/30 ~ 1/62,000 selectable	
Lens Mount	C-Mount	
Operating Temperature	-10 °C ~ +55 °C	
Power Requirement	12V DC, 380mA, 4.6W	
Dimension	50mm x 39mm x 83mm	
Ext. Sync.	Internal/External Auto Switch	
Async Reset	Standard	
Weight	200 g	


Note: Custom cameras are available upon request.

Color Coding Diagram:

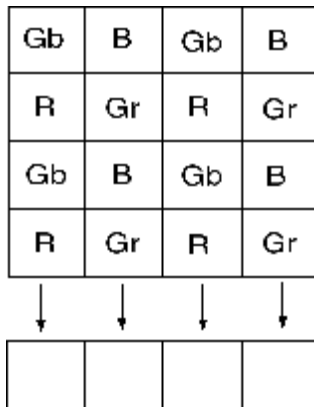

The bottom left pixel is the first signal output

Dimension:

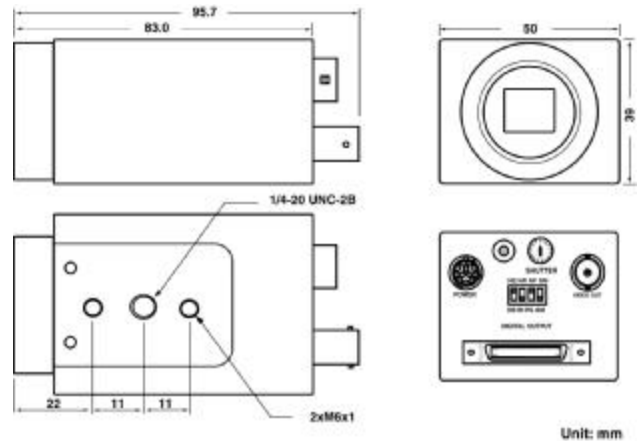

Note: Specifications are subject to change without notice