

UNI Q

USS-1800/USS-1800CL

B/W Digital CCD Camera

Key Features

- 0.0005 lux min. illumination (AGC max.)
- 2/3" Exview HAD (NIR) CCD Imager
- 1390 x 1037 active pixels
- 15 Hz frame rate
- 2 x 2 (694 x 518) Binning at 30 FPS
- 10-bit RS-644 (LVDS) / Camera Link digital output
- Analog output
- Full frame shutter
- <58 dB
- Asynchronous reset
- 27 MHz pixel clock
- RS-232C interface Control
- C-mount lens



Description

The USS-1800/USS-1800CL is a 10-bit digital CCD camera using progressive scan sensor. This compact and lightweight camera offers excellent signal to noise performance at a reasonable price. It's compatible with all camera link frame grabbers in the market. The "user-friendly" RS-232C interface control allows users to control all camera functions without physically touching the camera.

Applications


USS-1800/USS-1800CL applications include low light surveillance, X-ray imaging, military, and scientific applications.

Specifications:

Model	USS-1800	USS-1800CL
CCD Sensor	2/3" Exview HAD progressive scan interline-transfer CCD	
Chip Size	10.20 mm x 8.30 mm	
Effective Pixels (H x V)	1390 x 1037	
Unit Cell Size (H x V)	6.45 μ m x 6.45 μ m	
Pixel Clock	27 MHz	
Frame Rate	15 FPS (30 FPS for 2x2 binning)	
Sync.	HD: 15.733 KHz; VD: 14.998 Hz	
Digital Video Output	10-bit RS-644/LVDS	Camera Link format
Analog Video Output	1 V p-p, 75ohm (BNC or 12 pin Hirose)	
S/N Ratio	<58 dB	
Min. Illumination	0.0005 lux (AGC max.)	
Gain	AGC/MGC selectable	
Gamma	1.0	
Electronic Shutter	1/15 ~ 1/32,000 selectable	
Lens Mount	C-Mount	
Operating Temperature	-10 $^{\circ}$ C ~ +55 $^{\circ}$ C	
Power Requirement	12V DC, 280mA, 3.4 W	
Dimension	50mm x 39mm x 83mm	
Ext. Sync.	Internal/External Auto Switch	
Asynchronous Reset	Standard	
Weight	200 g	

Note: Custom cameras are available upon request.

Dimension:

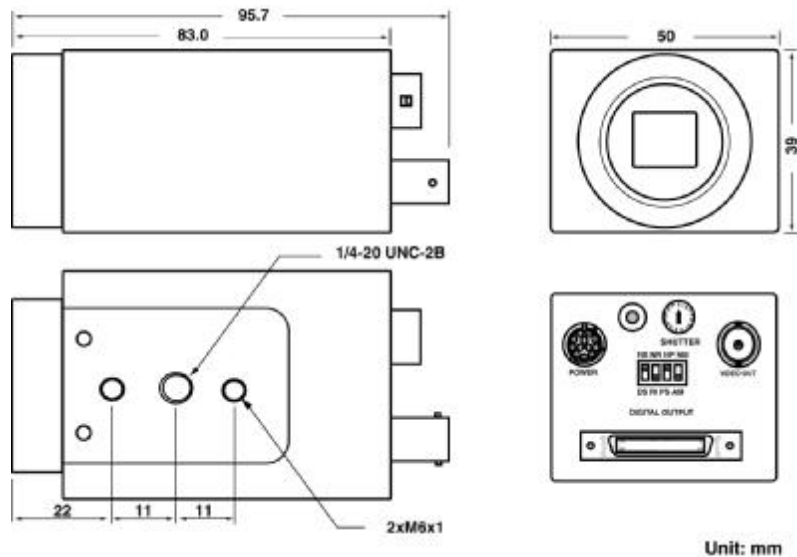

Note: Specifications are subject to change without notice