

# UNIQ

## UP-600-12B/UP-600CL-12B

B/W Digital CCD Camera

### Key Features

- 1/3" Progressive scan CCD imager
- 659 x 494 active pixels
- 12-bit RS-644 (LVDS)/  
Camera Link digital output
- Full frame shutter
- <65 dB
- Asynchronous capture
- 60 Hz frame rate  
(120Hz vertical binning)
- 25 MHz data clock
- Long-term frame integration
- External exposure control
- RS232C interface control
- C-mount lens



### Description

The UP-600-12B/UP-600CL-12B is a 12-bit digital CCD camera using progressive scan sensor. This compact and lightweight camera offers excellent signal to noise performance. It's compatible with most popular frame grabbers in the market. The "user-friendly" RS-232C interface control allows users to control all camera functions without physically touching the camera. This high performance digital camera is ideal for high dynamic range, low noise applications.

### Applications


UP-600-12B/UP-600CL-12B applications include high-speed machine vision, automated inspection, motion capture and analysis, and other industrial applications.

## Specifications:

Model	UP-600-12B	UP-600CL-12B
CCD Sensor	1/3" Hyper HAD progressive scan interline-transfer CCD	
Chip Size	5.79 mm x 4.89 mm	
Effective Pixels (H x V)	659 x 494	
Unit Cell Size (H x V)	7.4 $\mu$ m x 7.4 $\mu$ m	
Pixel Clock	25 MHz (50 MHz for master clock)	
Frame Rate	60 FPS (120 FPS Vertical binning)	
Sync.	HD: 31.485KHZ; VD: 59.972 Hz	
Digital Video Output	12-bit RS-644 (LVDS)	Camera Link format
Analog Video Output	1 V p-p, 75ohm (BNC or 12 pin Hirose)	
S/N Ratio	<65 dB	
Min. Illumination	0.2 lux	
Gain	MGC	
Gamma	1.0	
Electronic Shutter	1/60 ~ 1/62,000 selectable 16 steps	
Lens Mount	C-Mount	
Operating Temperature	-10 $^{\circ}$ C ~ +50 $^{\circ}$ C	
Power Requirement	12V DC, 250mA, 3.0W	
Dimension	50mm x 39mm x 83mm	
Ext. Sync.	Internal/External Auto Switch	
Async Reset	Standard	
Weight	200 g	

Note: Custom cameras are available upon request.

## Dimension:

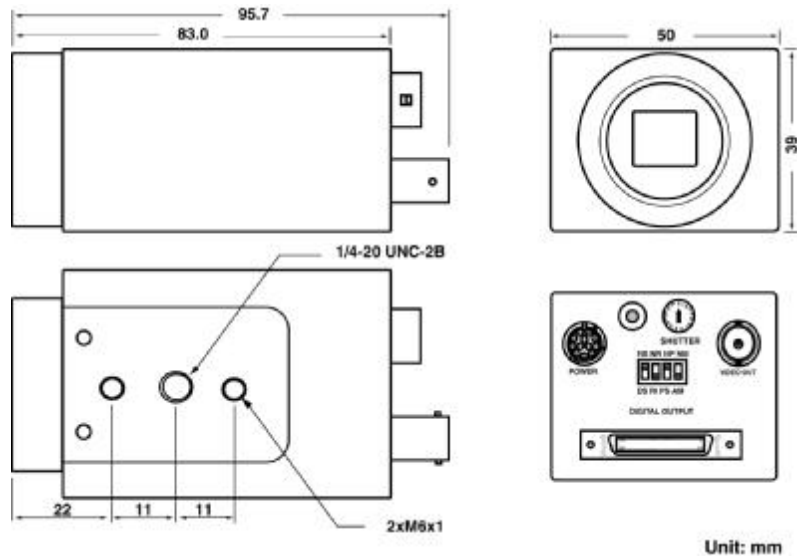

Note: Specifications are subject to change without notice